

TEHNICAL DATA SHEET

Novatik® | ALUMIO

CLICK S

Novatik ALUMIO roofs have offered remarkable performance for decades, as the alloy used is optimized by the raw material manufacturer for the production of roofing. The raw material from which we have chosen to produce the new Novatik ALUMIO range has successfully passed the most rigorous resistance tests: exposure to the outdoors and accelerated corrosion testing. This, combined with state-of-the-art coating, gives Novatik ALUMIO roofs a long lifespan, becoming a suitable solution that excels in durability and reliability.

Pre-treated aluminium in a unique, chromium-free and heavy-metal-free way, environmentally friendly and green energy make Novatik ALUMIO the natural choice in a world increasingly focused on protecting the environment. The remarkable painting system and aluminium's heat-reflective ability help reduce energy consumption, such as reducing the need for air conditioning during the summer. Novatik ALUMIO is a fully recyclable product, giving it the advantage of being one of the most eco-friendly roofing solutions.

Aluminium is by far the lightest material that can be used for roofing, being 65% lighter than steel, and its weight on the house's structure is never a problem. Novatik ALUMIO roof is an innovative alternative to traditional materials.

Novatik® | ALUMIO

>LAYERS

1. Polyester mat 25 µm;
2. Electrochemical treatment;
3. Aluminium;
4. Electrochemical treatment;
5. Lac polyester protection 5 µm



NEW RANGE

Novatik®
ALUMIO | CLICK S

TOTAL LENGTH 1000 – 6000 mm

WIDTH OF COVER 340 mm / 548 mm

ROOF PITCH Min. 8°

THICKNESS (ALUMINIUM + ORGANIC COATINGS) 0,64 mm

WEIGHT / SQM -

LOOK MAT EMBOSSED

SURFACE COATING Polyester 25 microns on the front side of the panel


PROTECTION LAYER Lack polyester protection 5 microns on the back side of the panel

RAW MATERIAL ALUMINIUM

UV RESISTANCE RUV 4

CORROSION RESISTANCE RC 4

Novatik®
ALUMIO | CLICK S

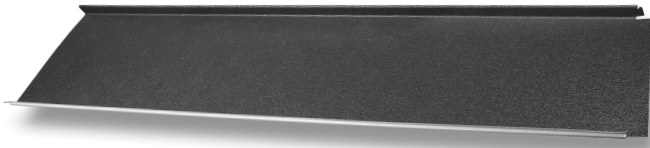

20

YEARS


AESTHETIC
WARRANTY

50

YEARS


TECHNICAL
WARRANTY

COLOURS



BLACK
RAL 9005

GREY
RAL 7016

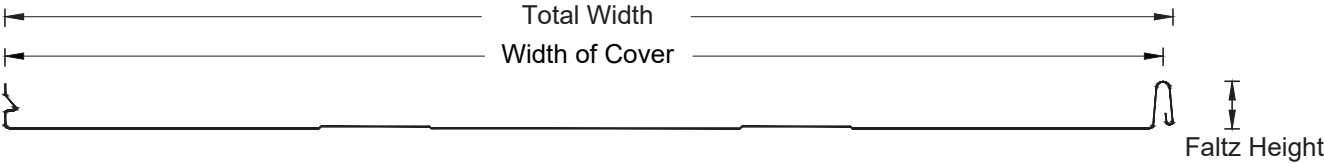

WIDTH OF COVER (mm)

TOTAL WIDTH (mm)

FALTZ HEIGHT (mm)

CLICK S ALUMIO 548

548 mm

555 mm

25.4 mm

CLICK S ALUMIO 340

340 mm

347 mm

25.4 mm