



Novatik[®] | METAL

“A ROOF FOR NINE LIVES, GUARANTEED BY THE EXPERTS!”


Novatik[®]
METAL
KOLAJ

Novatik[®]
METAL
WOOD

Novatik[®]
METAL
SLATE

Novatik[®]
METAL
CLASSIC
CLASSIC **DUO**

Novatik[®]
METAL
CLICK
CLICK S
CLICK **SILENT**
FALTZ

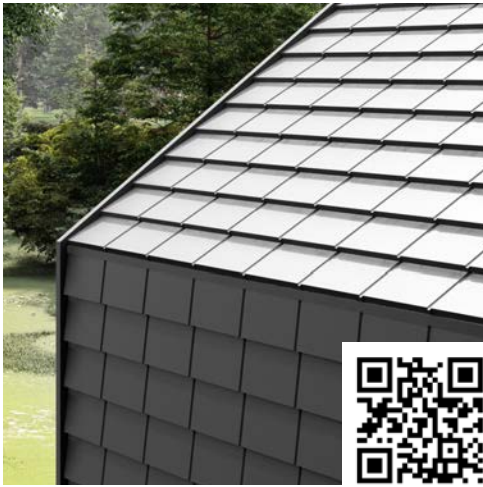

Novatik METAL | KOLAJ



NOW YOU ALSO HAVE THE POSSIBILITY OF VERTICAL FAÇADE CLADDING

Novatik METAL KOLAJ, a profile with emphasized horizontal lines, offers the roof a modern look, but, at the same time, a classic appearance, reminding of French mansard roofs or the stereotomy of the brick walls. It is a profile that particularly fits with the steep slope roofs, including for vertical cladding.

TOTAL LENGTH	LENGTH OF COVER	WIDTH OF COVER	TILES / SQM
1 305 mm	1 250 mm	233 mm	3,43



Novatik METAL | SLATE




MINIMAL, ROBUST AND WITH PERSONALITY!

Novatik METAL SLATE profile was created to combine natural slate look with the advantages of modern materials. With Novatik METAL SLATE you will have a roof with a simple design, functional aesthetics, minimalist and without unnecessary architectural elements. Strong linear elements and bold horizontal lines make Novatik METAL SLATE roof the ideal choice for all types of constructions and renovations. The versatile design of our iconic profile - Novatik METAL SLATE - allows tiles overlapping in 2 distinct installation ways: interlaced and linear arrangement, creating two different architectural styles for flat roofs.

TOTAL LENGTH	LENGTH OF COVER	WIDTH OF COVER	TILES / SQM
1 280 mm	1 225 mm	370 mm	2,17



Novatik METAL | WOOD




A ROOF WHICH TAKES CARE OF ITSELF!

The natural beauty of a wood shingle roof is completely recreated with our newest profile - Novatik METAL WOOD - while keeping all the advantages of metal tiles (lightweight, high corrosion protection, lasting strength and durability). Unlike traditional wooden shingles, which require maintenance or replacements, Novatik METAL WOOD shingles need very low maintenance.

TOTAL LENGTH	LENGTH OF COVER	WIDTH OF COVER	TILES / SQM
1 375 mm	1 295 mm	370 mm	2,09



Novatik METAL | CLASSIC




THE ROOF FOR THE MOST DEMANDING CUSTOMERS

The model of the Novatik METAL CLASSIC tile has been designed to ensure the appearance of a traditional tile, keeping the traditional look. The dimensions were specifically chosen to create a number of advantages: reduced technological losses, especially for roofs with a complex architecture, easy handling and storage, easy transport (easy access to the urban environment). The elegance, colour harmony, lightweight, strong fit system and quick installing made it recommend both for new and renovations.

TOTAL LENGTH	LENGTH OF COVER	WIDTH OF COVER	TILES / SQM
1 340 mm	1 260 mm	370 mm	2,15



Novatik METAL | CLASSIC DUO

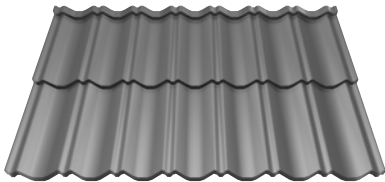

TWO TIMES MORE FRIENDLY WITH THE ROOF INSTALLERS

The bimodular design and symmetry of Novatik METAL CLASSIC DUO makes it one of the most effective types of metal roofing, which ensures easy and quick installation, minimizing technological losses. Based on elegance and refinement, classic remains a universal and timeless style, adaptable to any project.

TOTAL LENGTH	LENGTH OF COVER	WIDTH OF COVER	TILES / SQM
1 340 mm	1 260 mm	740 mm	1,07



Novatik METAL | CLICK / CLICK S




FOR PURRRRRRRFECT LINES

The standing seam metal roofing system is considered to be the closest option to the traditional metal roof. That is why Novatik METAL CLICK and CLICK S are the best solution both for reroofing or ultra-modern architectures. The shape, the dimensions and the falz assure a lower cost, without compromising the technical performances necessary for a high quality roofing system.

TOTAL LENGTH	WIDTH OF COVER		FALZ HEIGHT
1 - 6 m	CLICK	CLICK S	25,4 mm
	588/500/356 mm	530/386 mm	



Novatik METAL | CLICK SILENT

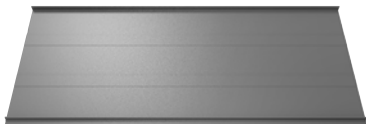

SOUNDLESS RAIN

Novatik METAL CLICK SILENT is a simple and rewarding solution for building acoustics improvement. Standing seem roof Novatik METAL CLICK SILENT - is improved in terms of sound insulation with a self-adhesive absorbent membrane designed for metallic constructions. It reduces the noise produced by rain and offers a maximum absorption of broadband sound from an enclosure. The membrane on the Novatik METAL CLICK SILENT works as an insulation layer against the noise produced by rain.

TOTAL LENGTH	WIDTH OF COVER	FALZ HEIGHT
1 - 6 m	588 mm	25,4 mm



Novatik METAL | FALTZ

HIDDEN FIXING FOR VISIBLE PROTECTION

Inspiring architects since ancient times, standing seam roofs find its place successfully even today, meeting all the requirements of a modern design with superior, durable and recyclable materials. Novatik METAL FALTZ (mini-coils of raw material used for the production of standing seam roof panel) it's a type of interlocking roof system where the metal panels are interconnected by standing seam thus forming sealing joints.

MINI-COIL TOTAL LENGTH	MINI -COIL WIDTH BEFORE FOLDING		WIDTH OF COVER STANDING SEAM PANEL		FALZ HEIGHT
50 ml	FALTZ ROBUST RAIN	FALTZ MAT	FALTZ ROBUST RAIN	FALTZ MAT	26 mm
	669 mm	695 mm	599 mm	625 mm	

Novatik[®] METAL

MAT

CLASSIC/CLASSIC DUO/SLATE/WOOD/
KOLAJ/CLICK/CLICK S/CLICK SILENT

0.5 mm	
20 YEARS AESTHETIC WARRANTY	30 YEARS TECHNICAL WARRANTY
0.6 mm	
20 YEARS AESTHETIC WARRANTY	40 YEARS TECHNICAL WARRANTY

Novatik[®] METAL

HIGH COAT + FROST


CLASSIC/CLASSIC DUO/SLATE/WOOD/
KOLAJ/CLICK/CLICK S/CLICK SILENT

0.5 mm	
20 YEARS AESTHETIC WARRANTY	40 YEARS TECHNICAL WARRANTY

Novatik[®] METAL

FALTZ ROBUST RAIN + FALTZ MAT

0.5 mm	
Novatik [®] METAL FALTZ ROBUST RAIN	Novatik [®] METAL FALTZ MAT
20 YEARS WARRANTY	15 YEARS WARRANTY

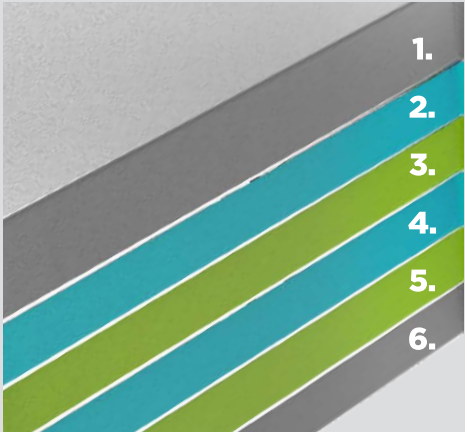

>LAYERS finishing MAT/HIGH COAT/FROST

- 1. **MAT:** Polyester Mat 35 µm;
HIGH COAT: Polyurethan - Polyamid 50 µm;
FROST: Polyurethan 60 µm;
(on the front side of the tile);
- 2. Primer;
- 3. Protective layer of: ZnMg | Zn;
- 4. Steel;
- 5. Protective layer of: ZnMg | Zn;
- 6. **MAT:** Polyester 10 µm / 7 µm;
HIGH COAT: Epoxid 10 µm;
FROST: Epoxid 12 µm;
(on the back side of the tile).

>LAYERS ROBUST RAIN / MAT

- 1. **ROBUST RAIN:** Polyester 35 µm;
MAT: Polyester 35 µm;
(on the front side of the tile);
- 2. Primer;
- 3. Protective layer of: Zn | ZnMg;
- 4. Steel;
- 5. Protective layer of: Zn | ZnMg;
- 6. **ROBUST RAIN:** Polyester 35 µm;
MAT: Polyester 10 µm / 7 µm;
(on the back side of the tile).

Novatik[®] METAL

COLOUR RANGE

MAT 0.5mm + FALTZ MAT

BLACK RAL 9005	GREY RAL 7016	BROWN RAL 8017
BROWN RAL 8019	BRICK RAL 8004	RED RAL 3009

MAT 0.6mm + HIGH COAT + FROST

BLACK RAL 9005	GREY RAL 7016
-------------------	------------------

FALTZ ROBUST RAIN

BLACK RAL 9005	GREY RAL 7016	BROWN RAL 8017	BROWN RAL 8019	BRICK RAL 8004
RED RAL 3009	BURGUNDY RAL 3005	WHITE RAL 9003	RED RAL 3011	SILVER RAL 9006

Novatik[®]

Manufactured by: NOVATIK SRL
HEAD QUARTERS: 9 Mai street, no. 75,
105200 Băicoi, Prahova, România
Tel: +40 244 260 140;
Fax: +40 244 260 145
Mobile: +40 725 081 680
office@novatik.ro
novatik.ro

