

TECHNICAL DATA SHEET

Novatik® NATURA | CLASSIC

With its curved lines and symmetric profile, Novatik NATURA CLASSIC is versatile and timeless. It is the perfect choice for those seeking an elegant roof style that will always be in fashion.

Novatik NATURA CLASSIC tiles are produced using premium quality steel, protected with ZnMg 250 g/sqm alloy plus additional multiface® anti-corrosion protection on both sides, and covered with natural volcanic stone chips. The multiface® protective layer represents a high-performance treatment applied to steel, with a thickness of 1 to 2 microns, and is an almost invisible (thin organic coating) sealant applied to hot-dip galvanized steel strips (ZnMg). Its remarkable properties give the steel a durable premium sealing, with excellent corrosion resistance and superior adhesion of subsequent finishing layers.

TRANSPARENT ACRYLIC COATING

TEXTURED FINISH
(VOLCANIC ROCK CHIPS)

BASE LAYER / COAT


MULTIFACE® PRIMER

PROTECTIVE LAYER ZN-MG

STEEL

PROTECTIVE LAYER ZN-MG

MULTIFACE® PRIMER

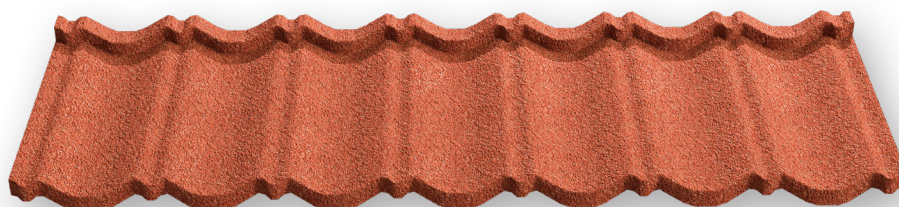

COLOURS:



TECHNICAL INFORMATION

| | |
|------------------------------|---|
| TOTAL LENGTH | 1340 mm |
| LENGTH OF COVER | 1260 mm |
| WIDTH OF COVER | 370 mm |
| TILES / SQM | 2.15 modules/sqm |
| ROOF PITCH | Min. 12° |
| WEIGHT / SQM | 6.50 kg/sqm |
| BATTEN SPACING | 370 mm |
| STEEL TYPE / STEEL THICKNESS | DX51 / 0.45 mm |
| CORROSION RESISTANCE | Protective Layer ZnMg 250 g/sqm + multiface® anti-corrosion protection |
| TEXTURED FINISHED | Acrylic resin + Volcanic rock (Basalt) + Protective layer |
| TOTAL MAXIMUM THICKNESS | 2.1 mm |

Manufactured by: NOVATIK SRL

HEAD QUARTERS: 9 Mai street, no. 75, Băicoi, Prahova, Tel: +40 244 260 140; Fax: +40 244 260 145; office@novatik.ro, novatik.ro
Novatik NATURA CLASSIC Technical Data Sheet – ENG_V2 | January 2023