

TECHNICAL DATA SHEET

Novatik® NATURA | WOOD

Novatik NATURA WOOD captures the natural beauty of a wood shingle roof. Long lasting, easy and quick to install and low maintenance, the modern materials used in its manufacture overcome the disadvantages-of a traditional wood roof. **Novatik NATURA WOOD** is the ideal choice-for those who are seeking a roof with a more rustic appeal.

Novatik NATURA WOOD tiles are produced using premium quality steel,-protected with ZnMg 250 g/sqm alloy plus additional multiface® anticorrosion-protection on both sides, and covered with natural volcanic stone chips. The multiface® protective layer represents a highperformance-treatment applied to steel, with a thickness of 1 to 2 microns, and is an almost invisible (thin organic coating) sealant applied to hot-dip galvanized steel strips (ZnMg). Its remarkable properties give the steel a durable premium sealing, with excellent corrosion resistance and superior adhesion of subsequent finishing layers.

TRANSPARENT ACRYLIC COATING

TEXTURED FINISH
(VOLCANIC ROCK CHIPS)

BASE LAYER / COAT


MULTIFACE® PRIMER

PROTECTIVE LAYER ZN-MG

STEEL

PROTECTIVE LAYER ZN-MG

MULTIFACE® PRIMER

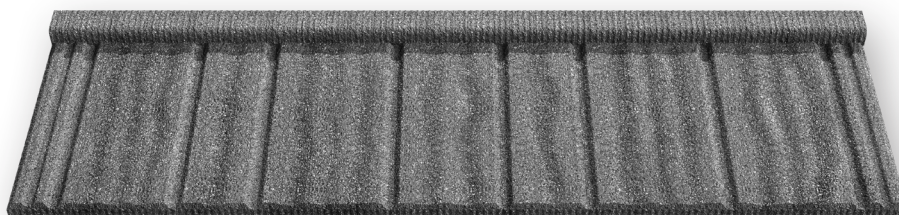

COLOURS:



TECHNICAL INFORMATION

TOTAL LENGTH	1375 mm
LENGTH OF COVER	1315 mm
WIDTH OF COVER	370 mm
TILES / SQM	2.09 modules/sqm
ROOF PITCH	Min. 16°
WEIGHT / SQM	aprox. 7.16 kg/sqm
BATTEN SPACING	370 mm
STEEL TYPE / STEEL THICKNESS	DX51 / 0.45 mm
CORROSION RESISTANCE	Protective Layer ZnMg 250 g/sqm + multiface® anti-corrosion protection
TEXTURED FINISHED	Acrylic resin + Volcanic rock (Basalt) + Protective layer
TOTAL MAXIMUM THICKNESS	2.1 mm

Manufactured by: NOVATIK SRL

HEAD QUARTERS: 9 Mai street, no. 75, Băicoi, Prahova, Tel: +40 244 260 140; Fax: +40 244 260 145; office@novatik.ro, novatik.ro
Novatik NATURA WOOD Technical Data Sheet – ENG_V2 | January 2023