TECHNICAL DATA SHEET

Novatik | METAL

CLASSIC **DUO**

The bimodular design and symmetry of Novatik METAL CLASSIC DUO makes it one of the most effective types of metal roofing, which ensures easy and quick installation, minimizing technological losses. Based on elegance and refinement, classic remains a universal and timeless style, adaptable to any project. Although Novatik METAL CLASSIC DUO keeps all the style characteristics, it also enjoys the modern roofing technology, offering to users, besides a perfectly harmonized appearance, safety through durability.

	Novatik	METAL CLASSIC **DUO** MAT	Novatik	METAL CLASSIC **DUO** HIGH COAT	Novatik	METAL CLASSIC **DUO** FROST
TOTAL LENGTH		1 340 mm		1 340 mm		1 340 mm
LENGTH OF COVER		1 260 mm		1 260 mm		1 260 mm
WIDTH OF COVER		740 mm		740 mm		740 mm
TILES/SQM		1,07 modules		1,07 modules		1.07 modules
ROOF PITCH		Min. 12°		Min. 12°		Min. 12°
THICKNESS (STEEL + ORGANIC COATINGS)		0,50/0,60 mm		0,51 mm		0,50 mm
WEIGHT / SQM		4,74 kg/sqm		4,96 kg/sqm		4,96 kg/sqm
LOOK		MAT		GLOSSY		CRYSTALLIZED
SURFACE COATING		Polyester Mat **35 microns**, on the front side of the tile		Polyurethan/Polyamid **50 microns**, on the front side of the tile		Polyurethan **60 microns** on the front side of the tile
PROTECTION LAYER		Lack polyester **10 microns / 7 microns**, on the back side of the tile		Lack Epoxid **10 microns**, on the back side of the tile		Lack Epoxid **12 microns**, on the back side of the tile
RAW MATERIAL		Steel with protective coating of **ZnMg 120g/sqm /Zn 275 g/sqm**		Steel with protective coating of **Zn 275 g/sqm /ZnMg 120 g/sqm**		Steel with protective coating of **Zn 275 g/sqm**
UV RESISTANCE		RUV 4		RUV 4		RUV 4
CORROSION RESISTANCE		RC 3		RC 4		RC 4

>LAYERS

finishing MAT/HIGH COAT/FROST

1. **MAT**: Polyester Mat 35 µm;
HIGH COAT: Polyurethan - Polyamid 50 µm;
FROST: Polyurethan 60 µm;
(on the front side of the tile);
2. Primer;
3. Protective layer of: ZnMg / Zn
4. Steel;
5. Protective layer of : ZnMg / Zn;
6. **MAT**: Polyester 10 µm / 7 µm;
HIGH COAT: Epoxid 10 µm;
FROST: Epoxid 12 µm;
(on the back side of the tile).



Novatik METAL | CLASSIC **DUO** MAT

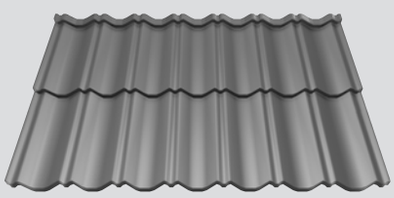

0.5 mm		0.6 mm	
20 YEARS AESTHETIC WARRANTY	30 YEARS TECHNICAL WARRANTY	20 YEARS AESTHETIC WARRANTY	40 YEARS TECHNICAL WARRANTY

Novatik METAL | CLASSIC **DUO** HIGH COAT

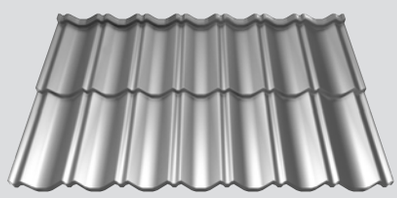

20 YEARS AESTHETIC WARRANTY	40 YEARS TECHNICAL WARRANTY

Novatik METAL | CLASSIC **DUO** FROST

20 YEARS AESTHETIC WARRANTY	40 YEARS TECHNICAL WARRANTY

COLOURS 0,5 mm

BLACK RAL 9005	GREY RAL 7016	BROWN RAL 8017
BROWN RAL 8019	BRICK RAL 8004	RED RAL 3009

COLOURS 0,6 mm

BLACK RAL 9005	GREY RAL 7016

COLOURS

BLACK RAL 9005	GREY RAL 7016

COLOURS

BLACK RAL 9005	GREY RAL 7016

Manufactured by: NOVATIK SRL
HEAD QUARTERS: 9 Mai street, no. 75, Băicoi, Prahova, Tel: +40 244 260 140; Fax: +40 244 260 145; office@novatik.ro, novatik.ro
Novatik METAL CLASSIC DUO Technical Data Sheet – ENG_V2 | January 2023